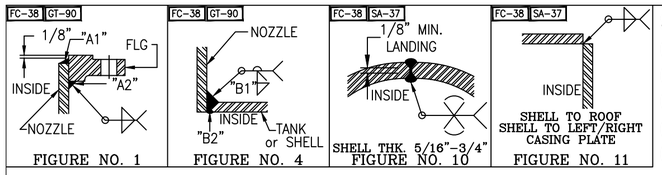

Ship loose items:
(1 PC EACH) GASKET FOR NOZZLE L1, L2, M, N, R.
(1 PC EACH) GASKET FOR LEFT AND RIGHT BOTTOM BRACKET
(1 PC EACH) GASKET FOR LEFT AND RIGHT TOP BRACKET
(1 PC EACH) GASKET FOR RIGHT COVER
(4 PCs) GASKET FOR SHROUD

*NOTE: SUPPORT STRUCTURE TO BE DESIGNED AND PROVIDED BY OTHERS.

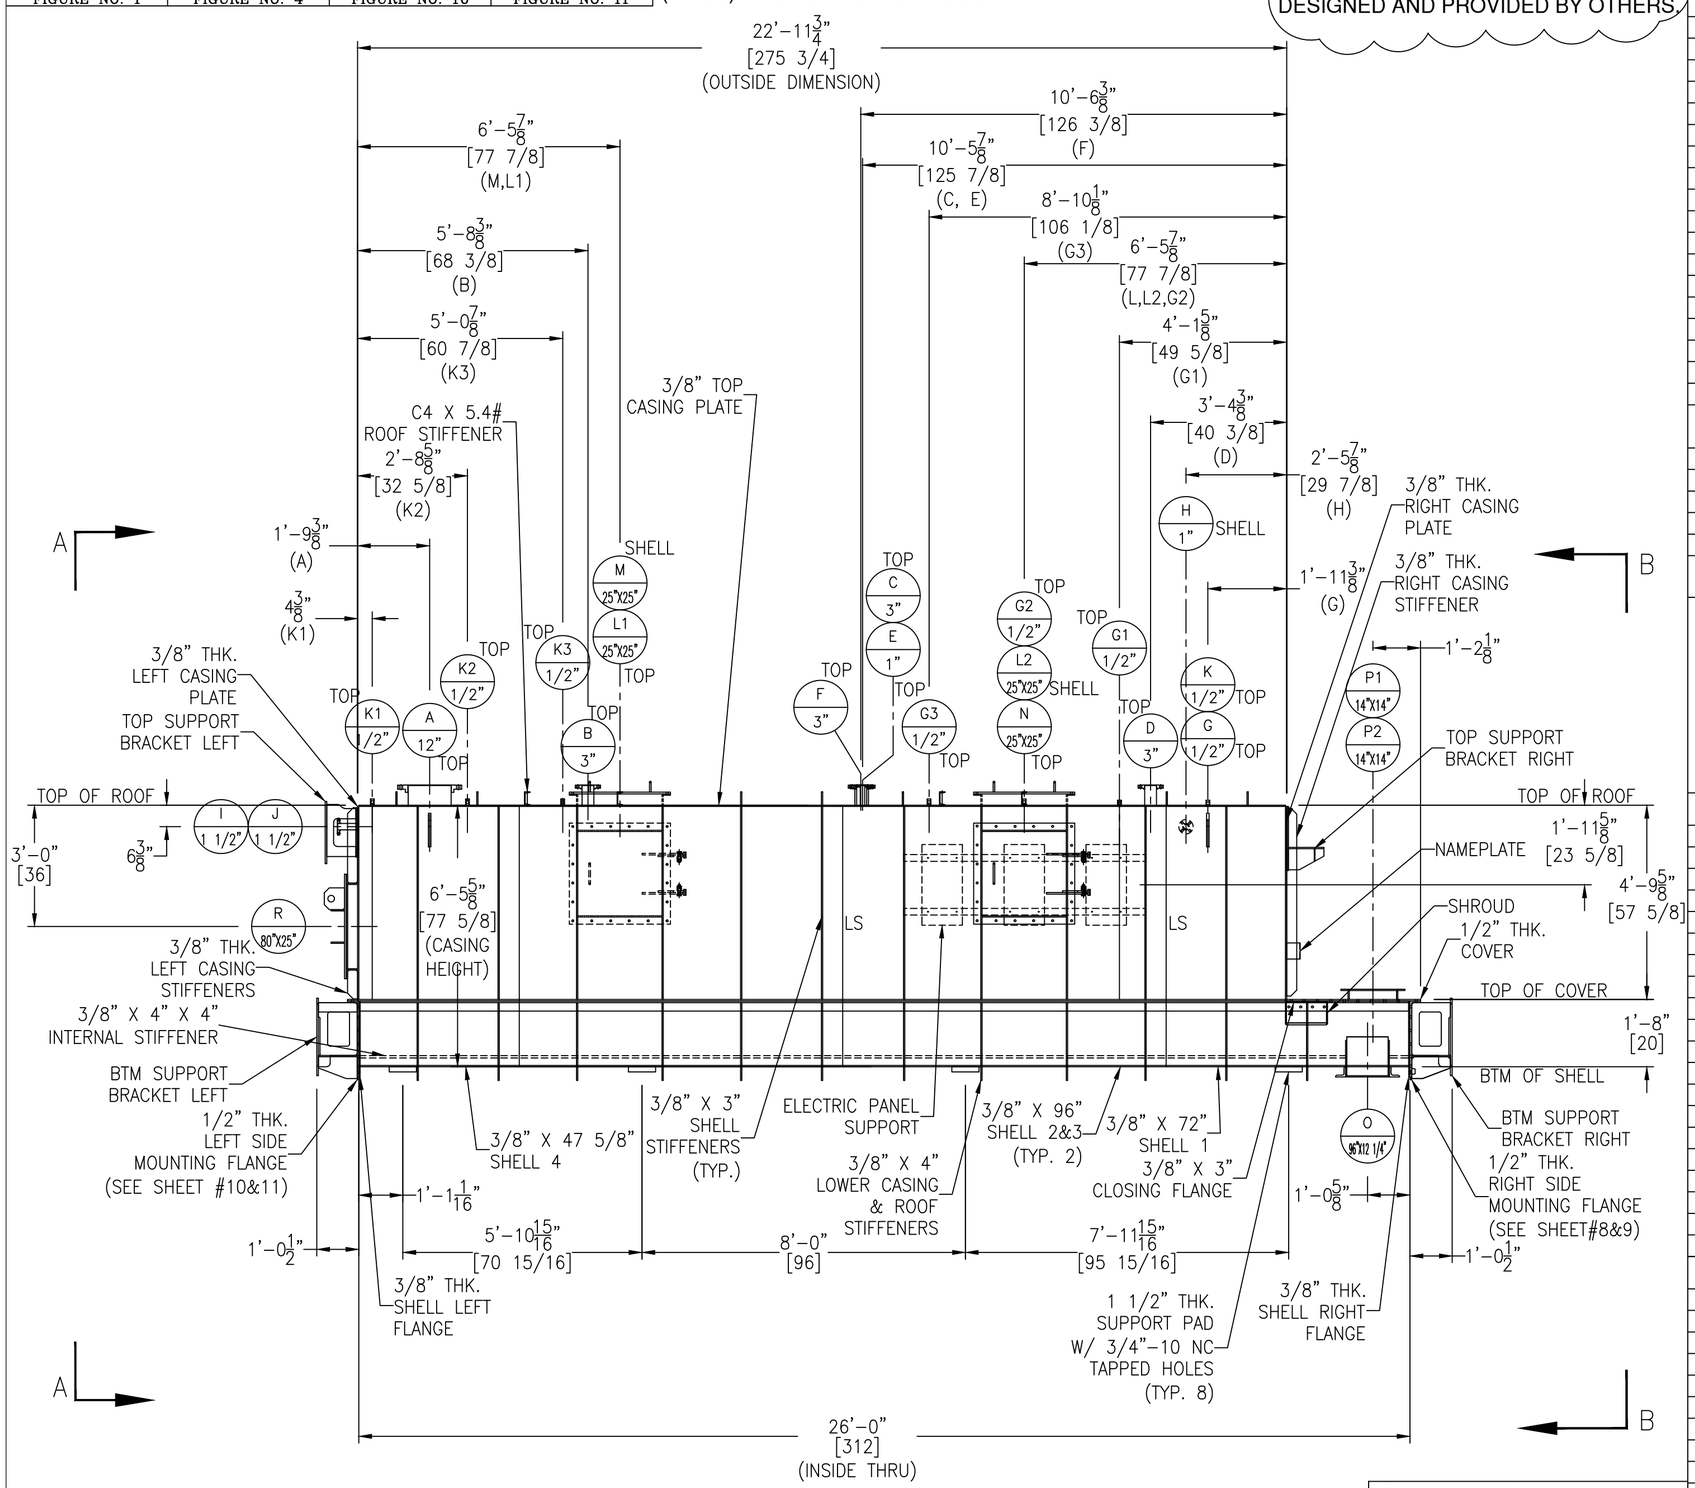

FRONT VIEW

NOZZLE SCHEDULE

MARK	SERVICE	SIZE	RATING	TYPE / STYLE	NECK SCHED.	PROJECTION EXT. (℄)	PROJECTION INT. (MIN.)	WELD FIGURE	REPAD SIZE (WIDTH X THK.)	WELD SIZE "A1"	"A2"	"B1"	"B2"	"C1"	"C2"
A	INLET	12"	150#	RFSO	40S	6"	–	1,4	–	1/4	1/4	1/8	1/8	–	–
B	LT	3"	150#	RFSO	40S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
C	LT	3"	150#	RFSO	40S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
D	LT	3"	150#	RFSO	40S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
E	PIT	1/2"	–	MALE NPT (THRD PIPE) McMASTER# 7736N104	–	–	–	4	–	–	–	1/8	1/8	–	–
F	RELIEF	3"	150#	RFSO	80S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
H	N2	1"	150#	RFSO	80S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
I	NITROGEN INLET LINE	1 1/2"	150#	RFSO	80S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
J	NITROGEN INLET LINE	1 1/2"	150#	RFSO	80S	6"	–	1,4	–	3/16	3/16	1/4	1/8	–	–
K	O2	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
G	O2	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
G1	SENSOR INLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
G2	SENSOR INLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
G3	SENSOR INLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
K1	SENSOR OUTLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
K2	SENSOR OUTLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
K3	SENSOR OUTLET	1/2"	3000#	FULL THRD CPLG	–	–	–	4	–	–	–	1/8	1/8	–	–
L1	ACCESS-FIXED	25"X25"	–	SQUARE MANWAY W/HANDLE	3/8"	SEE DETAIL			–	*****SEE DETAIL*****					
L2	ACCESS-FIXED	25"X25"	–	SQUARE MANWAY W/HANDLE	3/8"	SEE DETAIL			–	*****SEE DETAIL*****					
M	INSPECTION DOOR	25"X25"	–	SQUARE MANWAY W/HINGE	3/8"	SEE DETAIL			–	*****SEE DETAIL*****					
N	INSPECTION DOOR	25"X25"	–	SQUARE MANWAY W/HINGE	3/8"	SEE DETAIL			–	*****SEE DETAIL*****					
R	ACCESS	80"X25"	–	RECTANGLE MANWAY W/LUGS	3/8"	SEE DETAIL			–	*****SEE DETAIL*****					
O	OUTLET	96"X 12 1/4"	–	FLANGED SQUARE OPENING	3/8"	SEE DETAIL			–	–	–	1/4	1/8	–	–
P1	ACCESS	14"X14"	–	SQUARE MANWAY	3/8"	SEE DETAIL			–	1/4	1/4	1/4	1/4	–	–
P2	ACCESS	14"X14"	–	SQUARE MANWAY	3/8"	SEE DETAIL			–	1/4	1/4	1/4	1/4	–	–

QUALITY CONTROL

ENG. _____ DATE: _____

Q.C. _____ DATE: _____

GENERAL NOTES

1.) COVER ALL FLANGES, OPENINGS & MACHINED SURFACES PRIOR TO SHIPMENT UNLESS OTHERWISE NOTED.
2.) BOLT HOLES TO STRADDLE 0° & 180° UNLESS OTHERWISE NOTED.
3.) –
4.) MANUFACTURING TOLERANCE TO BE IN ACCORDANCE WITH API STANDARD 650 7.5.
5.) ASME MATERIALS TO CONFORM TO THE FOLLOWING: FLANGES – B16.5, FITTINGS – B16.9 & COUPLINGS – B16.11.
6.) PAINTING – SANDBLAST SP6. (1) COAT MACROPOXY 646 HAZE GRAY @3-4 MILS DFT PAINT.

MATERIALS OF CONSTRUCTION

	VESSEL
SHELL	SA36
FLAT COVERS	SA36
RIM ANGLE	–
NOZZLE NECKS	SA53-WLD
NOZZLE FLANGES	SA105
MANWAY NECKS	SA36
MANWAY FLANGES	SA36
GASKETS	RUBBER GASKET
BOLTS/STUDS	SA193-B7 (ZINC PLATED)
NUTS	SA194-2H (ZINC PLATED)
REPADS	SA36
COUPLINGS	–
SUPPORTS/HOLD DOWNS	SA36
LIFTING LUGS	SA36
VACUUM RINGS	–
INSULATION RINGS	–
GROUND LUG	SA36
BAFFLE	–
LADDER	–

DESIGN DATA

	VESSEL
DESIGN AND FAB. CODE	SHOP FAB
CERT. STAMP REQ'D.	NO
DESIGN PRESSURE	5 PSIG /-1 PSIG
DESIGN TEMPERATURE	120° F
MIN. DESIGN METAL TEMP.	0° F @ 5 PSIG
OPERATING PRESSURE	–
OPERATING TEMPERATURE	–
JOINT EFFICIENCY HEADS	0.70
JOINT EFFICIENCY SHELL	0.70
CORROSION ALLOWANCE	0"
SPECIFIC GRAVITY	1.0
EARTHQUAKE ZONE	–
WIND LOAD	–
STRESS RELIEF	NOT REQ'D
RADIOGRAPHIC EXAM	NOT REQ'D
DYE PENETRANT EXAM	NOT REQ'D
MAGNETIC PARTICLE EXAM	NOT REQ'D
HYDROSTATIC TEST	NOT REQ'D
PNEUMATIC TEST	2 PSIG

VESSEL FINISH

INTERIOR WELD TREATMENT:	SAV TANK STANDARD
EXTERIOR WELD TREATMENT:	SAV TANK STANDARD
SAV TANK FINISHING STANDARD:	N/A
INSULATION:	N/A
PAINTING:	SEE NOTE 6

VESSEL CAPACITY AND WEIGHTS

OPERATING CAPACITY	–
FULL CAPACITY	6,700 GAL.
EMPTY SHIPPING WEIGHT	29,100 LBS
WEIGHT FULL OF WATER	85,300 LBS
WEIGHT FULL OF PRODUCT	85,300 LBS

This drawing is issued for customer approval. please review, make approval changes (if any) in red. check the appropriate box, sign & date.

- ☐ Approval – no changes. Please proceed with fabrication.
- ☐ Approved as noted. Please proceed with fabrication
- ☐ Not approved. Please make changes and resubmit.

Customer signature _____ Date _____

REVISIONS

REV	D.BY	C.BY	DATE	DESCRIPTION
				AS BUILT
2	RS	NP	2/16/26	CERTIFIED
1	RS	NP	1/28/26	APPROVAL REV 1
0	RS	AD	12/29/25	APPROVAL

Savannah Tank & Equipment Corp.
1517 Telfair Road, Savannah, GA 31415
(912) 233-8902

DRAWN BY: RS
CHK'D BY: AD
APPROVED BY: NP
SCALE: 3/8" = 1'-0"

MERRICK INDUSTRIES, INC.
MH-5301-HP-05000-CASING
EQUIP. #
CUST. PO #M111921SHM

DRAWING NO.: 118-25-1 SHT 1 OF 16 REV. SET 2